




Topkarm med fast glas

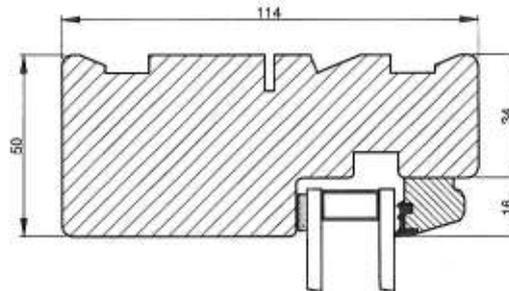

Sidekarm med fast glas

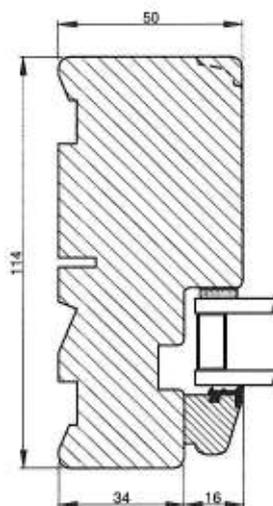


Bundkarm med fast glas

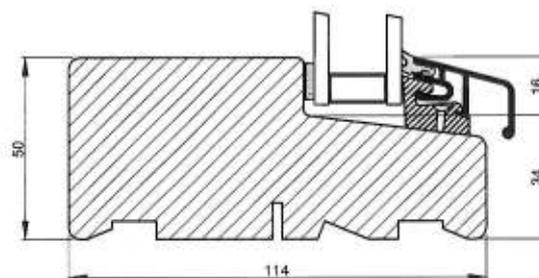


Type: GLASMONTAGE		Tegnet af: Made by: CHB	Date: Date: 28-10-10
DK: Fast karm	Mål: Scale: 1:2	Kontrolleret af: Controlled by:	Date: Date:
UK: Fixed frame		Rev. nr: 01	Side: Page: 01


Topkarm og ramme

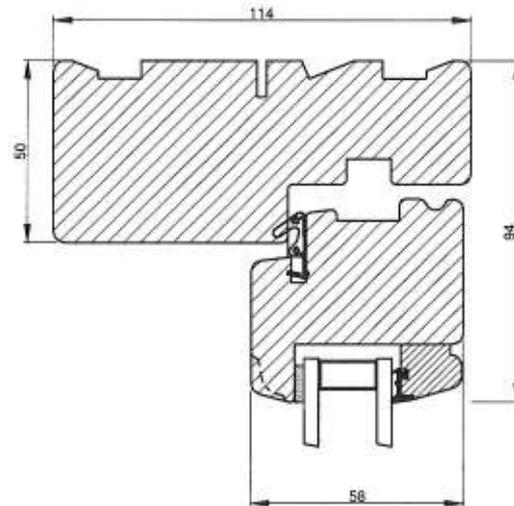

Sidekarm og ramme

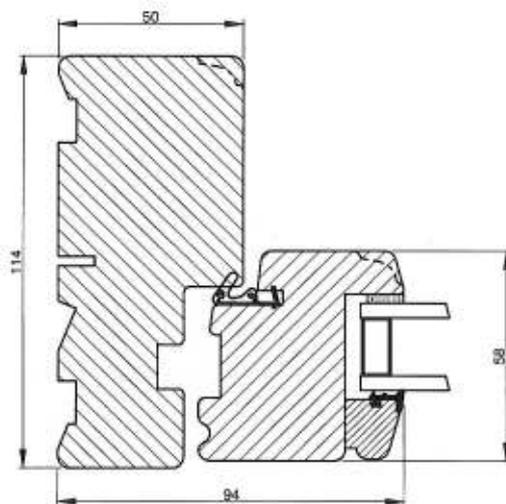


Bundkarm og ramme

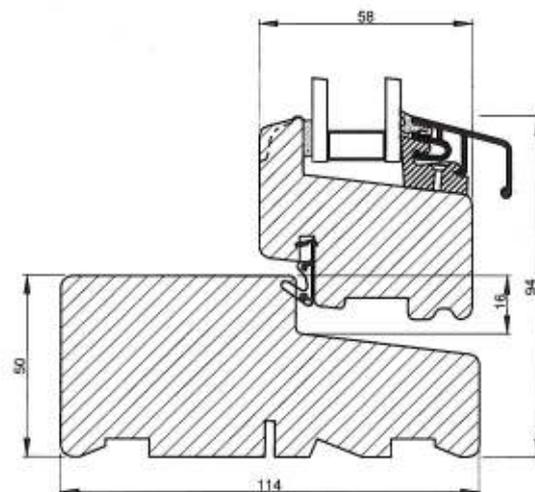


Type: GLASMONTAGE		Tegnet af: Made by: CHB	Dato: Date: 28-10-10
DK: Udadgående vindue	Mål: Scale:	Kontrolleret af: Controlled by:	Dato: Date:
UK: Outgoing window	1:2	Rev. nr: 01	Side: Page: 02


Topkarm og ramme

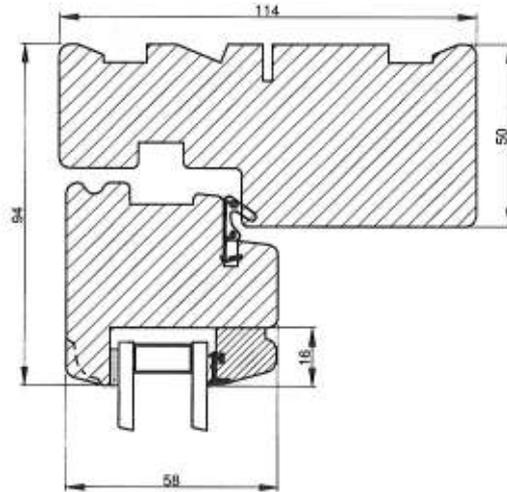

Sidekarm og ramme

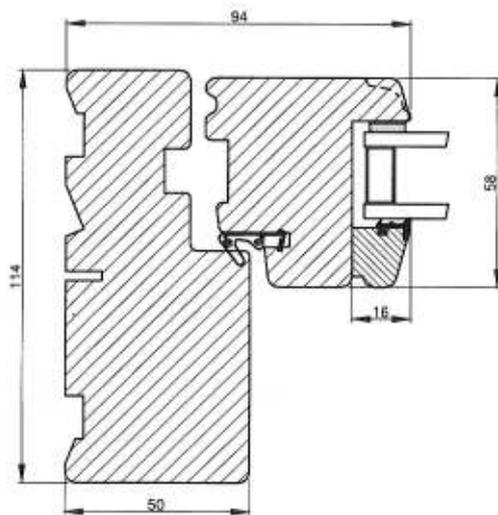


Bundkarm og ramme

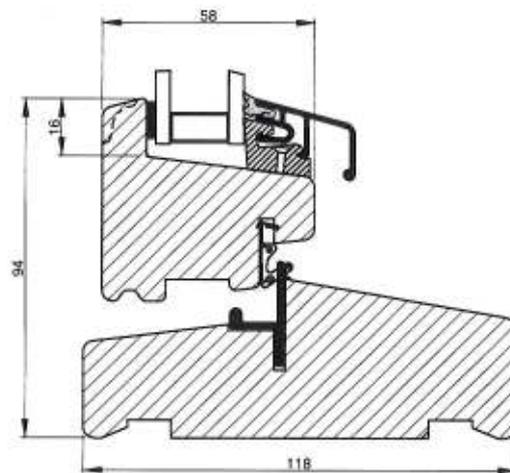


Type: GLASMONTAGE		Tegnet af: Made by: CHB	Date: Date: 28-10-10
DK: Indadgående vindue	Mål: Scale: 1:2	Kontrolleret af: Controlled by:	Date: Date:
UK: Ingoing window		Rev. nr: 01	Side: Page: 03


Topkarm og ramme

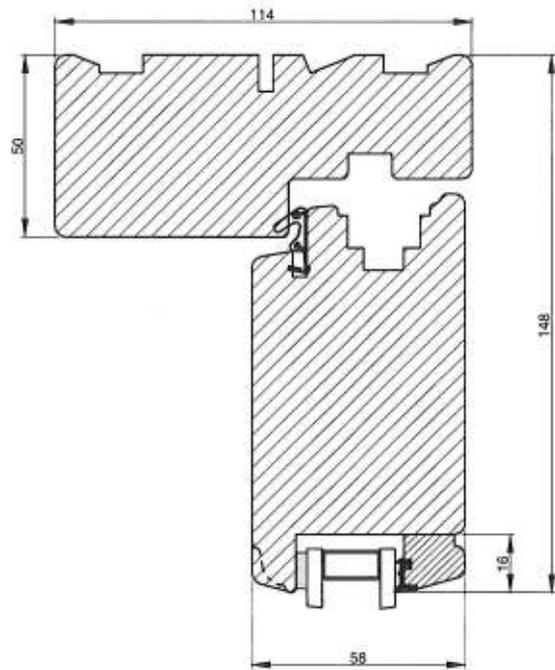

Sidekarm og ramme

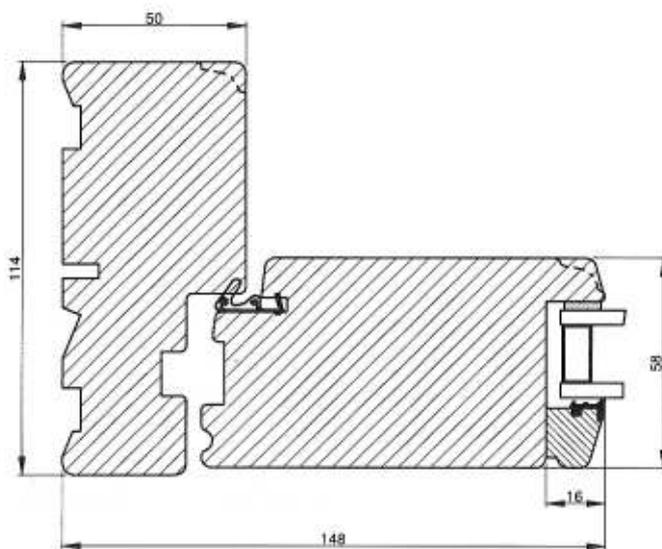


Bundkarm og ramme

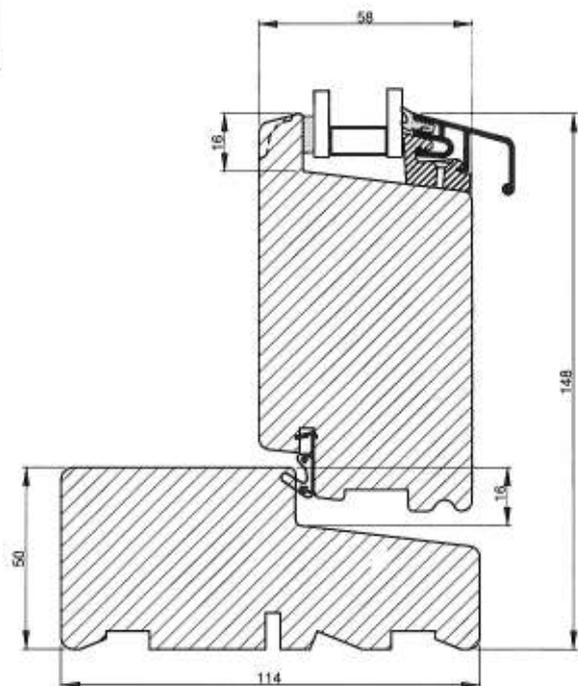


Type: GLASMONTAGE		Tegnet af: Made by: CHB	Date: Date: 28-10-10
DK: Udadgående dør	Mål: Scale: 1:2	Kontrolleret af: Controlled by:	Date: Date:
UK: Outgoing door		Rev. nr: 01	Side: Page: 04


Topkarm og ramme

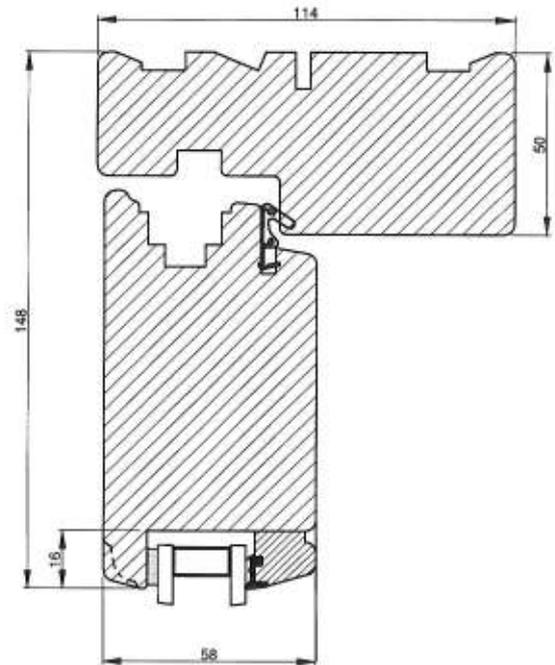

Sidekarm og ramme

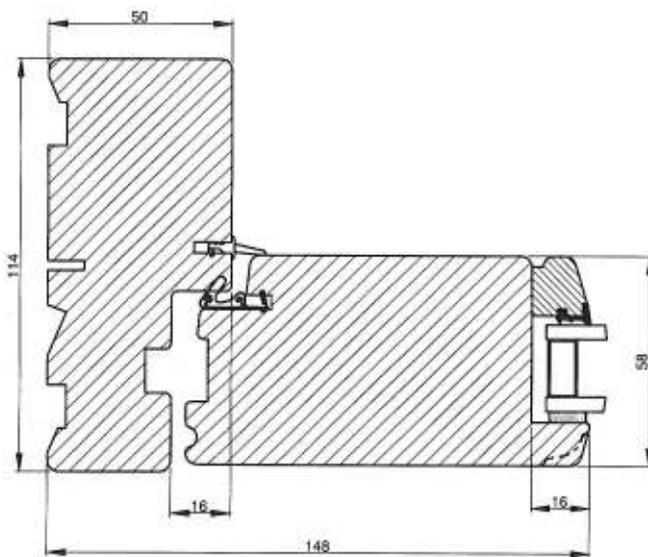


Bundkarm og ramme


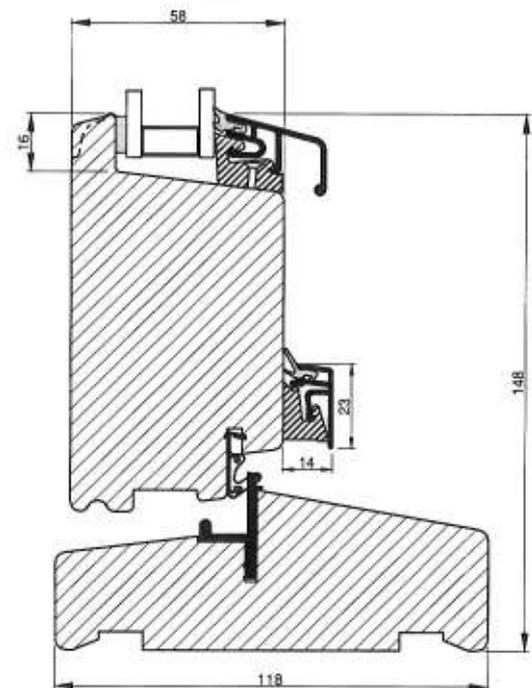


Type: GLASMONTAGE		Tegnet af: Made by: CHB	Dato: Date: 28-10-10
DK: Indadgående dør	Mål: Scale: 1:2	Kontrolleret af: Controlled by:	Dato: Date:
UK: Ingoing door		Rev. nr: 01	Side: Page: 05

Windows

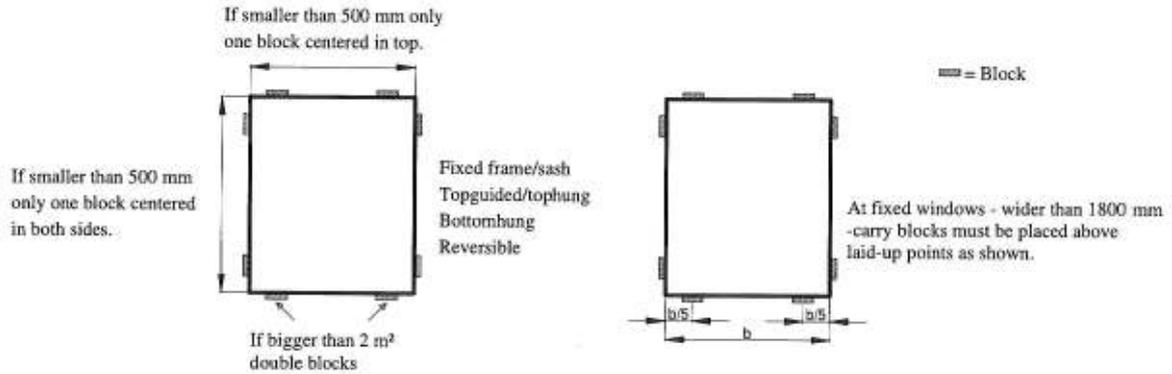

Sidehung windows

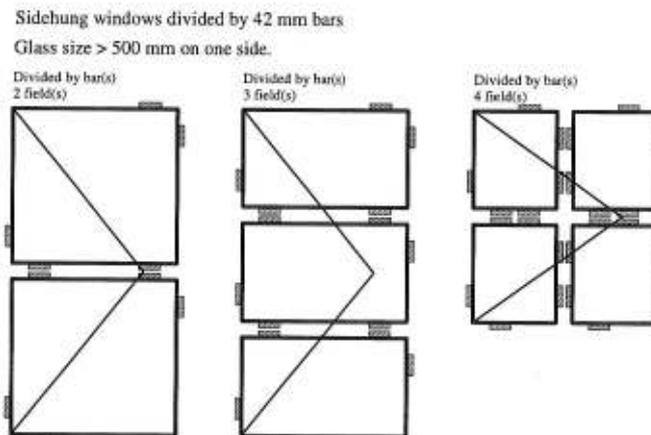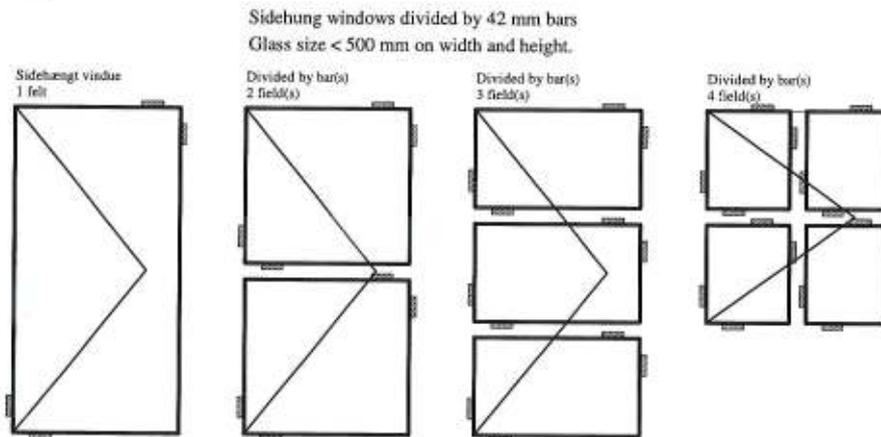

Distance from edge of glass 40-50 mm.
Blocs must not cover ventilation holes.


Mounting of glass blocks drawn intended on GS certification

Type:	GLASMONTAGE	Tegnet af: Made by:	CHB	Dato: Date:	28-10-10
DK: Placering af glasklodser	Mål: Scale: 1:2	Kontrolleret af: Controlled by:		Dato: Date:	
UK: Placement of glass blocks		Rev. nr:	01	Side: Page:	11

Doors


Sidehung doors

☐ = Block

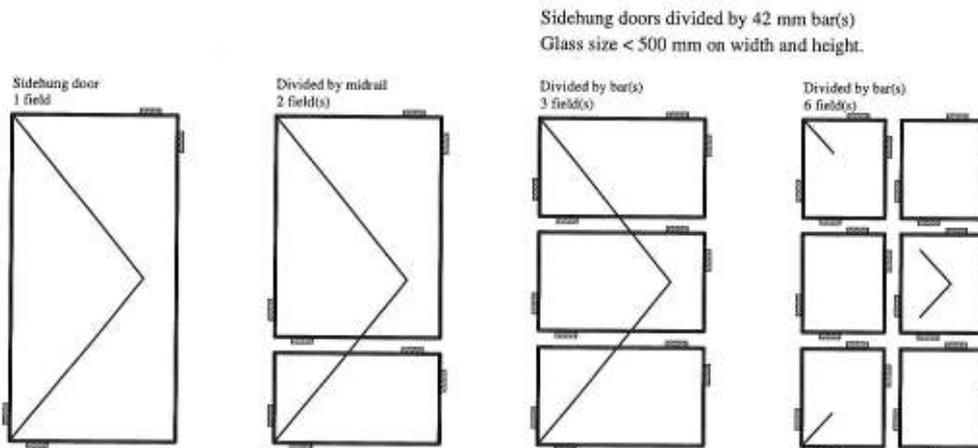

Fixed door sashes and sashes for
sideparties as fixed windows. (Page 1)

Sidehung doors divided by 42 mm bar(s)
Glass size > 500 mm on one side.

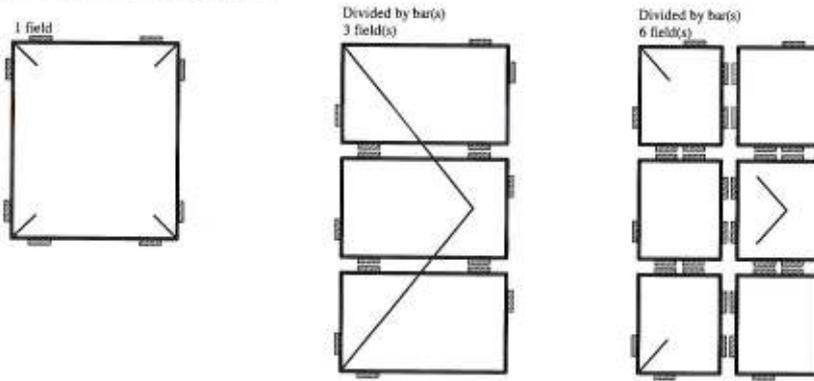

Distance from edge of glass 40-50 mm.
Blocs must not cover ventilation holes.

Type: GLASMONTAGE		Tegnet af: Made by: CHB	Dato: Date: 28-10-10
DK: Placering af glasklodser	Mål: Scale: 1:2	Kontrolleret af: Controlled by:	Dato: Date:
UK: Placement of glass blocks		Rev. nr: 01	Side: Page: 12